

BATHGATE

FLOORING



Made in the UK

A wide range of carpet tiles in over 200 colours, supplied and installed nationwide.



SUPPLIED



INSTALLED

BATHGATE

FLOORING



Bathgate Flooring consistently strives to maintain a position at the forefront of innovative design, environmental product production and an ideal to promote UK manufacturing.

contents

Bathgate Ranges

- Bathgate 1000
- Bathgate 2000
- Bathgate 3000
- Bathgate 4000
- Bathgate 5000



Bathgate carpet tile

Bathgate 1000

Bathgate 2000

Bathgate 3000

Bathgate 4000


Bathgate 5000

BATHGATE 1000


Solid performance and reliability as standard




Bathgate 1000, Jet
(LRV - L19.10 Y2.78)




Bathgate 1000, Tanzanite
(LRV - L26.27 Y4.84)




Bathgate 1000, Tempest
(LRV - L21.09 Y3.22)




Bathgate 1000, Paprika
(LRV - L31.27 Y6.71)



Bathgate 1000, Blue John
(LRV - L28.33 Y5.78)




Bathgate 1000, Topaz
(LRV - L34.92 Y8.50)



Bathgate 1000, Sapphire
(LRV - L26.97 Y4.95)



Bathgate 1000, Quartz
(LRV - L29.40 Y5.15)




Bathgate 1000, Pewter
(LRV - L46.71 Y15.55)




Bathgate 1000, Lime
(LRV - L46.02 Y15.29)



Made in the UK



BROADLOOM DESIGN



TESSELLATED DESIGN

Style	Tufted 1/10" Loop Pile Tile
Fibre Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	580 gsm
Pile Height	3.5mm
Total Weight	4360 gsm
Total Thickness	6.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Tile Size	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC4
Anti-static	<2Kv body voltage. Suitable for use with computers
Static Load to BS 4939	Not less than 80% recovery after 24 hours
Colour fastness to BS1006	To Light (BS EN ISO105-B02) Better than 6 To Shampoo BS 1006 - UK - TB Change in shade 4 - 5 To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability	Floorcoverings tested to BS4790 Low Radius of Char (Hot Metal Nut Test)
Euroclass Flammability	BS EN 13501 Bfi-s1
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 Years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 10

SUITABLE FOR ALL COMMERCIAL AND EDUCATION MARKETS

HEAVY CONTRACT

10 YEAR WARRANTY


PILE YARN WEIGHT 580 GSM

UP TO 50% RECYCLED CONTENT IN THE BITUMEN BACKING


Tile colours representative in print, order a full tile for true likeness.

BATHGATE 2000


General usage and light commercial

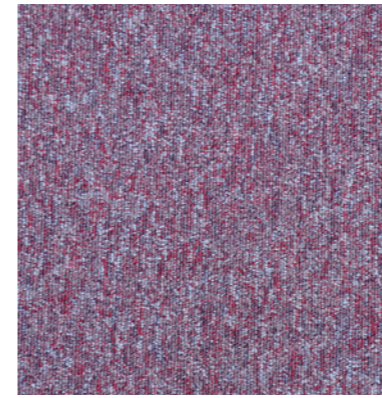


Bathgate 2000, 2315
(LRV - L29.37 Y6.01)



Bathgate 2000, 6013
(LRV - L31.47 Y6.90)



Bathgate 2000, 6310
(LRV - L30.02 Y6.30)



Bathgate 2000, 6011
(LRV - L28.03 Y5.49)




Bathgate 2000, 8001
(LRV - L31.83 Y7.11)




Bathgate 2000, 8007
(LRV - L18.06 Y2.54)



Bathgate 2000, 8302
(LRV - L37.56 Y9.86)



Bathgate 2000, 8316
(LRV - L26.87 Y5.09)



Bathgate 2000, 872315
(LRV - L23.32 Y4.00)



Bathgate 2000, 876310
(LRV - L24.33 Y4.26)



Bathgate 2000, 876013
(LRV - L25.89 Y4.85)



Bathgate 2000, 878316
(LRV - L23.24 Y3.91)



Bathgate 2000, 868302
(LRV - L32.78 Y7.54)



Bathgate 2000, 878302
(LRV - L30.84 Y6.91)

Style	1/10th gauge
Yarn Construction	100% Solution dyed nylon
Pile Yarn Weight	450gsm
Pile Height	3mm
Total Weight	4030 gsm
Total Thickness	5.5mm
Backing	100% Envirobace - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Dimensions	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Flammability	BFL-S1 (BS EN 13501-1)
Castor chair	Suitable for intensive use
Warranty	10 years

TOTAL COLOURWAY OPTIONS - 14

SUITABLE FOR GENERAL OFFICE, SCHOOLS AND LIGHT COMMERCIAL AREAS

ATTRACTIVE ENCAPSULATED YARN

AVAILABLE FROM STOCK

BLEACH RESISTANT YARN

EASY TO CLEAN


PASSES RELEVANT FLAMMABILITY TEST

COST-EFFECTIVE FLOORCOVERING SOLUTION


UP TO 65% RECYCLED CONTENT IN THE BITUMEN BACKING



Made in the UK



BROADLOOM DESIGN



TESSELLATED DESIGN

Tile colours representative in print, order a full tile for true likeness.

BATHGATE 3000

Is a random lay product



616812 Gusto
(LRV - L=21.89 Y=3.57)



810820 Vibe
(LRV - L=33.83 Y=8.04)



812810 Asha
(LRV - L=24.28 Y=4.39)



812820 Armada
(LRV - L=26.25 Y=5.31)



616810 Jaxx
(LRV - L=28.64 Y=5.74)

Style	Tufted 1/10" Loop Pile Tile
Fibre Construction	100% Solution Dyed Nylon
Pile Yarn Weight	500 gsm
Pile Height	3mm
Total Weight	4280 gsm
Total Thickness	5.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Tile Size	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	<2Kv body voltage. Suitable for use with computers
Static Load to BS 4939	Not less than 80% recovery after 24 hours
Colour fastness to BS1006	To Light (BS EN ISO105-B02) Better than 6 To Shampoo BS 1006 - UK - TB Change in shade 4 - 5 To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability	Floorcoverings tested to BS4790 Low Radius of Char (Hot Metal Nut Test)
Euroclass Flammability	Bfl-s1 (BS EN 13501)
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 Years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	Breeam® 'A+' Rated

Bathgate 3000 (Vibe/Asha/Armada/Jaxx/Gusto) is a random lay product

TOTAL COLOURWAY OPTIONS - 5

SUITABLE FOR OFFICE, COMMERCIAL, RETAIL, SCHOOLS, COLLEGES, AND LEISURE

HEAVY CONTRACT

100% SOLUTION DYED NYLON

10 YEAR WARRANTY


500 GSM PILE YARN WEIGHT

UP TO 65% OF THE TOTAL PRODUCT IS RECYCLED CONTENT



BREEAM® 'A+' Rated

Made in the UK




RANDOM LAY DESIGN

Tile colours representative in print, order a full tile for true likeness.

BATHGATE 3000


A balanced range of modern, heavy contract colours for most commercial uses

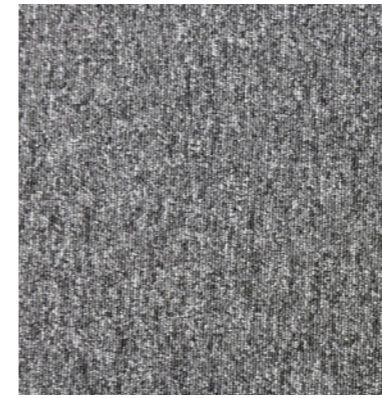


Bathgate 3000, Lupus Grey 811
(LRV - L5.32 Y27.56)



Bathgate 3000
Purple Rain, 750
(LRV - L24.46 Y4.26)



Bathgate 3000
Razzmic Berry, 740
(LRV - L29.56 Y6.07)



Bathgate 3000
Panther, 812
(LRV - L19.77 Y2.94)




Bathgate 3000
Foundry Grey, 810
(LRV - L30.93 Y6.63)




Bathgate 3000
Mouse, 830
(LRV - L47.31 Y16.28)



Bathgate 3000
London Stone, 820
(LRV - L37.87 Y10.04)




Bathgate 3000
Liberty, 612
(LRV - L20.55 Y3.13)



Bathgate 3000
Electric, 625
(LRV - L27.04 Y5.12)




Bathgate 3000
Denim, 616
(LRV - L26.53 Y4.95)



Bathgate 3000
Skylight, 640
(LRV - L33.14 Y7.65)



Bathgate 3000
Blazer, 210
(LRV - L25.30 Y4.52)



Bathgate 3000
Racing Green, 505
(LRV - L26.40 Y4.89)



Bathgate 3000
Grasshopper, 550
(LRV - L44.79 Y14.41)



Bathgate 3000
Bark, 108
(LRV - L37.52 Y9.82)

Style	Tufted 1/10" Loop Pile Tile
Fibre Construction	100% Solution Dyed Nylon
Pile Yarn Weight	500 gsm
Pile Height	3mm
Total Weight	4280 gsm
Total Thickness	5.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Tile Size	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	<2Kv body voltage. Suitable for use with computers
Static Load to BS 4939	Not less than 80% recovery after 24 hours
Colour fastness to BS1006	To Light (BS EN ISO105-B02) Better than 6 To Shampoo BS 1006 - UK - TB Change in shade 4 - 5 To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability	Floorcoverings tested to BS4790 Low Radius of Char (Hot Metal Nut Test)
Euroclass Flammability	Bfl-s1 (BS EN 13501)
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 Years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	Breem@ 'A+' Rated

TOTAL COLOURWAY OPTIONS - 15

SUITABLE FOR OFFICE, COMMERCIAL, RETAIL, SCHOOLS, COLLEGES, AND LEISURE

HEAVY CONTRACT

100% SOLUTION DYED NYLON

10 YEAR WARRANTY


500 GSM PILE YARN WEIGHT

UP TO 65% OF THE TOTAL PRODUCT IS RECYCLED CONTENT




BREEAM 'A+' Rated


Made in the UK



RANDOM LAY DESIGN



BROADLOOM DESIGN




TESSELLATED DESIGN


Tile colours representative in print, order a full tile for true likeness.

BATHGATE 4000

A balanced range of modern, heavy contract colours for most commercial uses

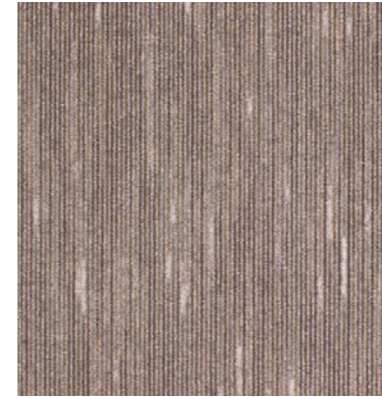

Bathgate 4000
7002 - Nobu Grey
(LRV - L46.86 Y15.67)



Bathgate 4000
5004 - Apollo Blue
(LRV - L24.48 Y4.42)




Bathgate 4000
5009 - Metro Blue
(LRV - L22.36 Y3.50)




Bathgate 4000
3001 - Millennium Blue
(LRV - L35.33 Y8.18)




Bathgate 4000
4009 - Clockhouse Blue
(LRV - L22.57 Y3.72)



Bathgate 4000
5181 - Victoria Blue
(LRV - L19.46 Y2.92)



Bathgate 4000
3012 - Broadway
(LRV - L34.25 Y8.17)




Bathgate 4000
4018 - Regents Canal
(LRV - L26.81 Y5.12)




Bathgate 4000
3013 - Docklands Grey
(LRV - L35.94 Y9.01)




Bathgate 4000
5014 - Islington Tunnel
(LRV - L27.96 Y5.54)




Bathgate 4000
7005 - Savoy Ochre
(LRV - L45.95 Y15.80)




Bathgate 4000
3193 - Beauchamp Brown
(LRV - L30.62 Y6.53)



Bathgate 4000
7008 - West End Fawn
(LRV - L39.39 Y10.09)



Bathgate 4000
7017 - Alber Green
(LRV - L42.69 Y13.09)



Bathgate 4000
3016 - Westow Park Plum
(LRV - L32.85 Y7.50)

Style	Tufted Loop Pile Tile 1/10" gauge
Yarn Construction	100% solution dyed nylon/ space dyed nylon
Pile Yarn Weight	600 gsm
Pile Height	3mm
Total Weight	4380 gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Dimensions	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	< 2kV body voltage Suitable for use with computers
Colour Fastness	To Light BS EN (ISO105 - B02) 6 To Water BS EN (ISO105 - EO1) 4 - 5
Flammability Euroclass	Flammability Bfl-s1 (BS EN 13501)
Castor Chair Test	> 2.9 Suitable for continuous use BS EN 985 /
Warranty	10 Years
VOC Content	E1 in relation to EN 14041:2004
Environmental	Status Breeam® 'A+' Rated

TOTAL COLOURWAY OPTIONS - 15

SUITABLE FOR OFFICE, COMMERCIAL, RETAIL,
SCHOOLS, COLLEGES, AND LEISURE

HEAVY CONTRACT

10 YEAR WARRANTY


600 GSM PILE YARN WEIGHT

UP TO 50% RECYCLED CONTENT IN THE BITUMEN BACKING




Made in the UK

BREEAM® 'A+' Rated



BROADLOOM DESIGN




TESSELLATED DESIGN


Tile colours representative in print, order a full tile
for true likeness.

BATHGATE 5000


Cutting edge linear design for contemporary schemes

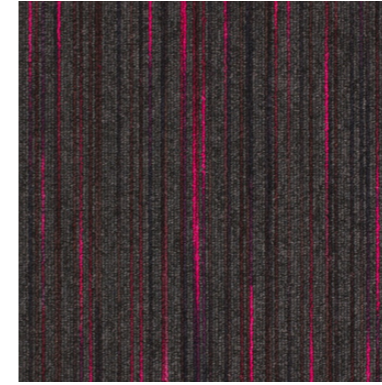


Bathgate 5000
Spark 2621
(LRV - L25.36 Y4.57)




Bathgate 5000
Flex 2620
(LRV - L26.23 Y4.97)




Bathgate 5000
Blaze 2604
(LRV - L24.35 Y4.24)




Bathgate 5000
Extreme 2606
(LRV - L26.83 Y5.11)



Bathgate 5000
Ignite 2603
(LRV - L29.02 Y6.09)



Bathgate 5000
Rapid 2614
(LRV - L28.12 Y5.53)



Bathgate 5000
Force 2605
(LRV - L31.78 Y7.47)



Bathgate 5000
Plasma 2619
(LRV - L24.53 Y4.29)



Bathgate 5000
Grey Fusion Highlight
(Accent colour for all colourways)
(LRV - L25.79 Y4.69)

Style	1/10" gauge
Yarn Construction	Solution Dyed / Space Dyed
Pile Yarn Weight	610 gsm (Grey Fusion 580gsm)
Pile Height	3mm
Total Weight	4400 gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Dimensions	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	< 2kV body voltage Suitable for use with computers
Colour Fastness	To Light (ISO105 - B02) > 6 To Water (ISO 105 - E01) > 5 To Rubbing (ISO 105 - X12) > 5dry 4-5 wet Flammability BS 4790 Low radius of char BS EN 13501-1 Bfl-s1
Castor Chair Test	BS EN 985 continuous use
Warranty	10 Year Warranty
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	Breeam® 'A+' Rated

TOTAL COLOURWAY OPTIONS - 8+1

SUITABLE FOR OFFICE, COMMERCIAL, RETAIL, SCHOOLS, COLLEGES AND LEISURE

HEAVY CONTRACT

10 YEAR WARRANTY


610 GSM (GREY FUSION 580GSM) PILE YARN WEIGHT

UP TO 50% OF THE TOTAL PRODUCT IS RECYCLED CONTENT




BREEAM® 'A+' Rated

Made in the UK



BROADLOOM DESIGN



TESSELLATED DESIGN

Tile colours representative in print, order a full tile for true likeness.

Cleaning & Maintenance Guide

To maximise the carpet's aesthetic appeal, performance and life expectancy, it is imperative to ensure at the specification stage that:

- 1, Carpets will be protected from other site activities during installation and thereafter.
- 2, Clients understand the enclosed information and that they accept responsibility for correct carpet care.
- 3, Carpets are protected from excess soiling or moisture in entrance areas, by use of an effective barrier material such as those from the mat.works range

General Cleaning

Daily vacuuming with a twin motored upright vacuum cleaner, preferably with an adjustable head, is recommended. It is essential to remove all loose soil daily because if left to build up, the particles of dirt are much harder to remove and are more damaging to the fibre structure, thereby decreasing the life of the carpet.

Attention should be given to areas where there is extra traffic and in entrances to buildings where extra vacuuming is necessary.

Depending on the level of installation trafficking, the carpet should be periodically deep cleaned using high performance hot water extraction equipment.

Rotary brush cleaning not recommended.

A reputable contract cleaner should be used, preferably NCCA registered (for NCCA details visit www.ncca.co.uk). It is important that the carpet is deep cleaned at least once a year.

Stain Removal

It is essential to deal with spillages immediately and any subsequent stains as appropriate.

In the event of a spillage, immediately blot with a clean absorbent cloth until there is no further transfer from the carpet to the cloth. If any further stain remains or has otherwise been allowed to dry, the method will vary accordingly.

It is recognised that particularly for contract situations, if stains are not dealt with immediately, cleaning staff may not be in a position to identify the type of stain. A good quality, multipurpose stain remover is therefore very useful, although it must be understood that this will not successfully tackle all types of stains, and wherever possible the chart recommendations should be strictly followed. Also any stains left over a period of time become increasingly more difficult to remove and may require several treatments.

In all cases after stain removal the carpet should be allowed to dry completely and then cleaned with a twin motored upright vacuum cleaner.

Solvent cleaning of bitumen backed tiles should preferably be avoided. Where this is not possible, extra caution should be taken and only very light surface cleaning should take place dependant on substrate.

If any of the treatments listed are not successful, seek professional help. Further advice can be found at www.prochem.co.uk/stain_removal_guide.htm

The methods are recommended in good faith; however, we cannot accept responsibility for their use in any specific case.

Stain Type	Stain Removal Procedure
Tea / Coffee Food Fountain Pen Ink Water Based Paint	A liquid detergent solution such as Granwax Ezee Spot & Stain Remover. Apply the solution to the stained area. Lightly agitate affected areas & remove by use of absorbent cloth. Stubborn stains may require a second application
Chewing Gum	Apply Chewing Gum Remover then break-up and remove pieces or pierce gum with fork or Prochem Perforator Block then apply Citrus Gel or Solvall Spotter and leave for a few minutes. Remove softened gum with spatula or blunt knife. For large areas apply Bazooka Gum Remover in conjunction with Bazooka Gum Removal Machine.
Grease	Scrape up excess, hardened residue prior to wetting. Apply Solvex or Solvall Spotter and blot. Apply Citrus Gel and blot. Apply Stain Pro and blot. For larger areas apply Power Burst then rinse extract thoroughly
Ink (solvent soluble)	Apply Solvex and blot – no not rub. Repeat as needed. If stain persists, apply Citrus Gel. Rinse thoroughly with water and blot until dry. Note: All inks are not the same and different approaches may have to be evaluated.
Milk	Apply Stain Pro and blot. Apply Fibre & Fabric Rinse solution and blot until dry. If stain persists apply Solvex or Citrus Gel and blot. Apply Neutral Pro-Spotter and blot. Rinse thoroughly with water and blot until dry.
Oils	Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot until dry. Where a solvent cannot be used apply Power Burst solution, brush and rinse with Fibre & Fabric Rinse solution.
Oil Based Paint / Varnish	Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot. Re-apply Solvex until as much paint as possible is removed then weight down the stain with towels for several hours to loosen. Apply Neutral Pro-Spotter, work into stain then blot. Rinse thoroughly with water and blot until dry.
Shoe Polish	Apply Solvex or Sovall Spotter & blot. Apply Citrus Gel & blot. Rinse thoroughly with water & blot until dry
Tar & Asphalt	Scrape off as much as possible with blunt knife. Apply Solvall Spotter or Solvex and blot. Apply Citrus Gel and blot. Apply Neutral Pro-Spotter and blot then rinse thoroughly with water and blot until dry.

Health and Safety

Please ensure that for all above referenced items, the Manufacturers' use & safety instructions are adhered to.

Granwax Ezee Spot & Stain Remover can be obtained from Granwax Products Ltd; Telephone 01773 541177

Other products listed can be obtained from Prochem Europe Ltd; Telephone 020 8974 1515

BATHGATE

FLOORING

711 Cavendish Avenue Birchwood Park Warrington WA3 6DE

t: 01925 230 014

e: info@bathgateflooring.co.uk

