

B38598 Light Duty Bare Panel

BSEN12825:2001 - 2/A/3/2 Light Duty


The panel consists of a high grade, FSC® certified, 38mm, high density, particle board core with a square edge profile at 598mm x 598mm to produce a fully accessible system at an economic cost.

Product	Panel Grade	Classification	Safety Factor	Ultimate Load	Panel Thickness (Nominal)	System Weight (Typical)
B38598	Light	2/A/3/2	3x	> 4.0kN	38mm	29kg/m ²

Certification

The panel is fully tested to the BSEN12825:2001 2/A/3/2 specification and is fully compliant. The Permaflor B38598 panels have a 3 times working load safety factor and a 5 year warranty.

Bare High Density Particle Board Finish 598mm²

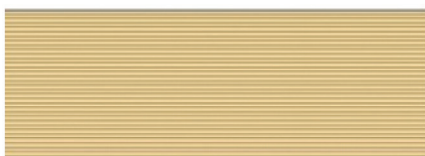

Square Edge



Finish

All of the Permaflor bare panels are designed for light traffic areas where access to the under floor void is required but costs are prohibitive. Designed to have loose lay carpet tiles to finish the floor. Whatever your requirement, Permaflor will have the flooring solution for you.

Manufacture

All panels are manufactured in our flexible manufacturing facility in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.



Permaflor is the manufacturing division of Bathgate Flooring

01432 353 003

sales@bathgateflooring.co.uk

bathgateflooring.co.uk

Bathgate Flooring Units 6 E,F & G Thorn Business Park Rotherwas Hereford HR2 6JT