


# Support Pedestal E Range

## BSEN 12825 Medium Duty

Manufactured within the UK, allowing us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Fully compliant and tested with the Permaflor panel to BSEN12825:2001.

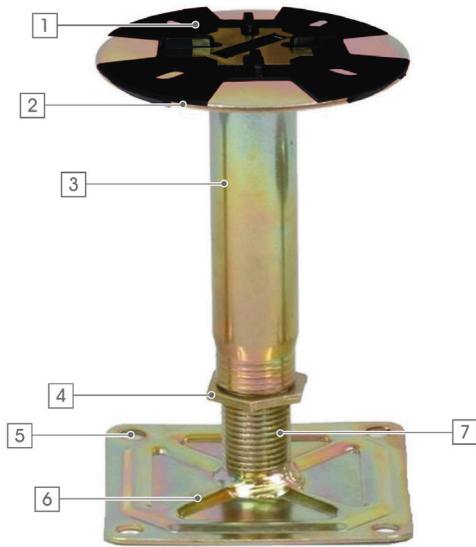

Pedestal Grade	Head Size	Base Size	Void Range
Euro / BSEN	90mm	80 x 80 mm	50 - 475mm

1. Anti-vibration cap.
2. 90mm x 2mm thick head mild steel electro zinc plated.
3. 25.5mm OD mild steel electro zinc plated threaded tube.
4. 3mm thick locking nut.
5. Pre-formed holes for optional mechanical fixing to slab.
6. Steel square base 80mm x 80mm.
7. 20mm mild steel tube electro zinc plated. Threaded entire length.

### Head

Mild Steel Disc 90mm in diameter by 2mm thick welded onto a 25.5mm outside diameter mild steel tube reduced at one end to take the mating thread of the base. The locking nut allows fine adjustment of the head to the correct finished floor height and can then be fixed with adhesive. A variety of different pedestal caps are available to suit perimeter, stringers etc.

### Threaded Column

20mm threaded mild steel tube is Electro Zinc Plated and cut to a suitable length.

### Base

The base is mild steel 80mm x 80mm square, with the central boss housing the steel tube. Punched holes are incorporated to facilitate mechanical fixings if required. Earthing studs may also be pre-fitted. Strengthening ribs are pressed in for added stability.



Permaflor is the manufacturing division of Bathgate Flooring

01432 353 003

sales@bathgateflooring.co.uk

bathgateflooring.co.uk

Bathgate Flooring Units 6 E,F & G Thorn Business Park Rotherwas Hereford HR2 6JT