



H and X Range Support Pedestal


Tested in accordance with PSA MOB PF2 PS/SPU for raised access floors

Medium, Heavy and Extra Heavy Grade

Sourced within the UK, allowing us to offer total flexibility whilst maintaining the highest possible quality standard and ensuring fast reaction and a reliable service. Steel pedestals are electro plated and coated with an environmentally friendly clear passivation.

Fully compliant and tested with the Permaflor panel to PSA MOB PF2 PS/SPU.

1. Anti-vibration cap
2. 3mm thick steel head
3. Threaded hollow steel tube
4. 3mm thick locking nut
5. Steel 100mm square base 2.5mm thick
6. Pre-formed holes for optional mechanical fixing to slab

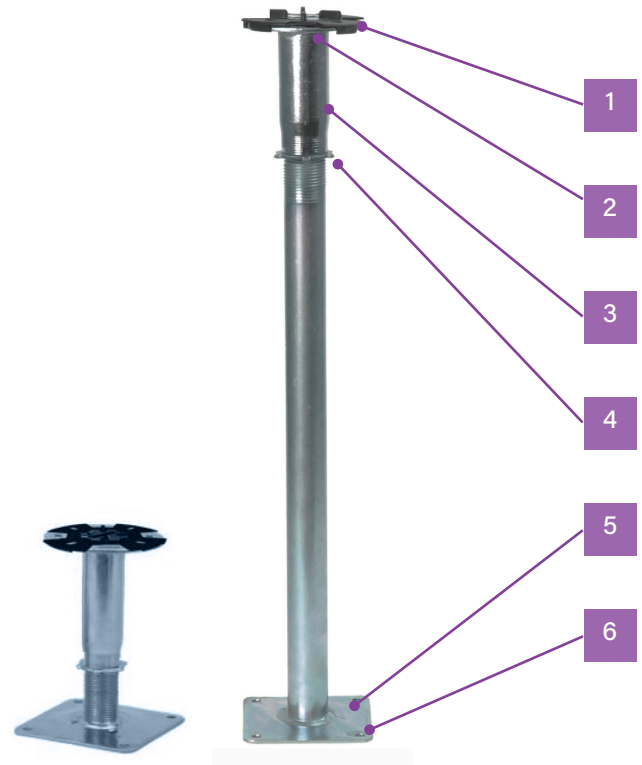

PEDESTAL GRADE	HEAD SIZE	TUBE SIZE	BASE SIZE	VOID RANGE
PSA H Range	90mm diameter 3mm thick	25mm OD	100 x 100mm	26 - 675mm*
PSA X Range	90mm diameter 3mm thick	32mm OD	100 x 100mm	75 - 1525mm*

Head

Mild Steel Disc 90mm in diameter by 3mm thick welded onto a mild steel tube reduced at one end to take the mating thread of the steel tube connected to the base. The locking nut allows fine adjustment of the head to the correct finished floor height and can then be fixed with adhesive (if required). A variety of different pedestal caps are available to suit perimeter, stringers etc.

Base

The base is mild steel 100mm square, with the central tube welded to the base. Punched holes are incorporated to facilitate mechanical fixings if required. Earthing clips may also be supplied. Strengthening ribs are pressed in for added stability.

Warranty only valid when a full Bathgate Access Floor system including panels and understructure is installed.
* Pedestals required outside of this height range are also available.

Supply & Install 01432 347 700 info@bathgateflooring.co.uk

Supply Only 01432 347 722 supplyonly@bathgateflooring.co.uk

Bathgate Flooring Unit 6G Thorn Business Park Hereford HR2 6JT

bathgateflooring.co.uk