

## Permaflor BEM600VSF & BEH600VSF




### Medium and Heavy Grade Panel

#### For: A System Floor Panel

The panel comprises of a galvanised steel top and bottom tray that are bonded to an FSC® certified, high density particle board core for greater strength and durability. The panel can offer a static dissipative Vinyl or other customer approved finish, then the panel is finished with a half depth edge banding.

It is designed to be gravity laid with complete electrical continuity and has a high resistance to damage.

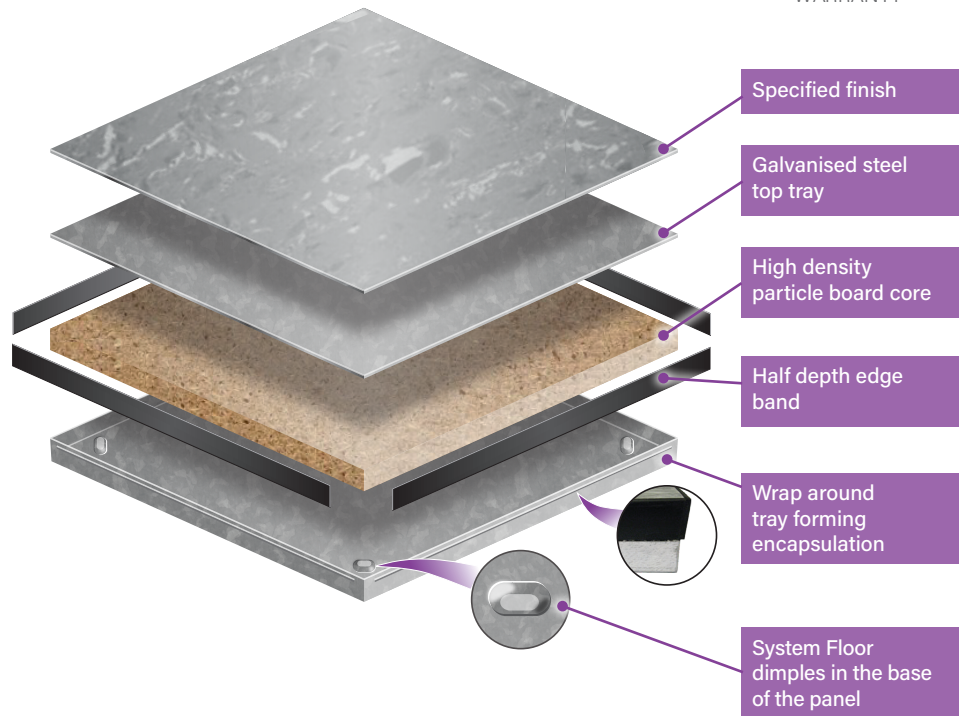

Panels			
PRODUCT CODE	PANEL GRADE	THICKNESS (Nominal)	SYSTEM WEIGHT
BEM600VSF	Medium	33mm	35kg/m <sup>2</sup>
BEH600VSF	Heavy	42mm	45kg/m <sup>2</sup>

System Performance		
POINT LOAD 25mm <sup>2</sup>	LOAD OVER 300mm <sup>2</sup>	(UDL) Uniformly Distributed Load
3.0 kN	4.5 kN	8.0 kN
4.5 kN	N/A	12.0 kN

Technical	
FIRE PERFORMANCE	Class 'O' spread of flame, BS476-6 & BS476-7.
KEY DIMENSIONAL	Length: ± 0.4mm; Square: 600×600 <sup>±</sup> ± 0.5mm; Thickness ± 0.5mm.

**Underfloor Plenum**

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

### Finish Option

All standard panels will be covered with our Gerflor Mipolan EL7 Robust static dissipative vinyl, other options include HPL, Wood, Ceramic and Stone.



Supply & Install

01432 347 700

info@bathgateflooring.co.uk

Supply Only

01432 347 722

supplyonly@bathgateflooring.co.uk

Bathgate Flooring Unit 6G Thorn Business Park Hereford HR2 6JT

bathgateflooring.co.uk