


## Support Stringers


Manufactured within the UK, allowing us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service.



### Clip on Stringer

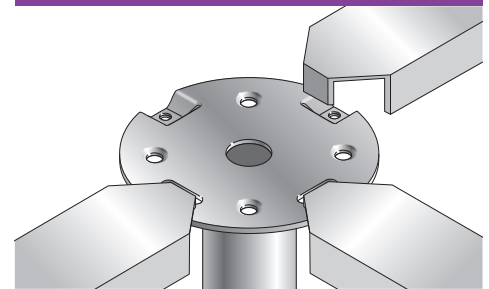

### Bolt on Stringer

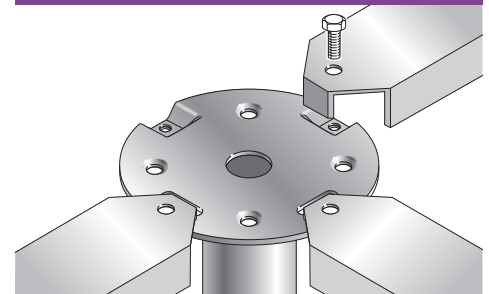

METAL THICKNESS	GRID SIZE	VOID RANGE
1.5mm / 2mm	600mm	500mm and over

Stringers are used where additional lateral stability is required or where floor heights exceed 500mm. The stringers are attached to the pedestals either via a clip in slot arrangement or screw fixed. Stringers will improve lateral stability and rigidity but will not effect the load bearing performance.

1.5mm stringer, U channel mild steel pre galvanised with hook in location with screw down facility.

2mm stringer, U channel mild steel construction, galvanised to BS 1706:1990 Fe/Zn 5c2c hook in location with screw down facility.

Bespoke sectional steels made to customers requirements.

### Other Ancillaries

- Yellow Sealer
- Red Sealer
- XP 2788 Adhesive
- Permaflor1 Adhesive
- Class O Foil Tape
- Class O Perimeter Gasket Tape
- Sleeved M6 x 40mm Nail In Anchor Fixing
- Masonry Drill Bit 6.5mm
- M6 x 45mm Taptite Machine Screw
- BAG600BX Floor Grille
- Support Stringers

Supply & Install  01432 347 700  [info@bathgateflooring.co.uk](mailto:info@bathgateflooring.co.uk)

Supply Only  01432 347 722  [supplyonly@bathgateflooring.co.uk](mailto:supplyonly@bathgateflooring.co.uk)

 Bathgate Flooring Unit 6G Thorn Business Park Hereford HR2 6JT

 [bathgateflooring.co.uk](http://bathgateflooring.co.uk)