

Permaflor BEM600VSF & BEH600VSF




Medium and Heavy Grade Panel

For: A System Floor Panel

The panel comprises of a galvanised steel top and bottom tray that are bonded to an FSC® certified, high density particle board core for greater strength and durability. The panel can offer a static dissipative Vinyl or other customer approved finish, then the panel is finished with a half depth edge banding.

It is designed to be gravity laid with complete electrical continuity and has a high resistance to damage.

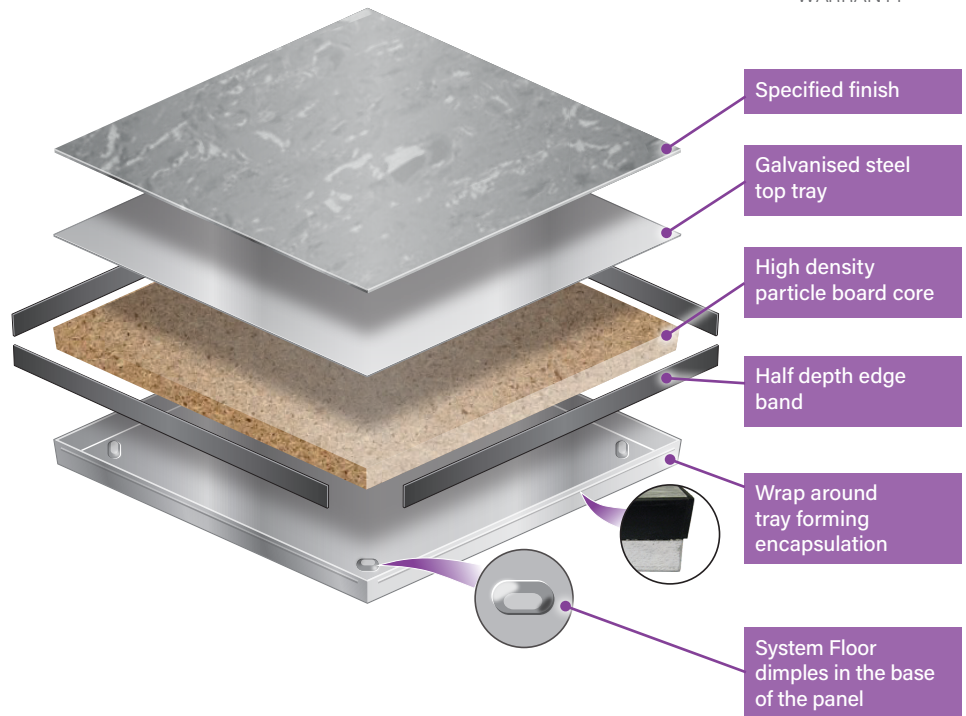

Panels			
PRODUCT CODE	PANEL GRADE	THICKNESS (Nominal)	SYSTEM WEIGHT
BEM600VSF	Medium	33mm	35kg/m ²
BEH600VSF	Heavy	42mm	45kg/m ²

System Performance		
POINT LOAD 25mm ²	LOAD OVER 300mm ²	(UDL) Uniformly Distributed Load
3.0 kN	4.5 kN	8.0 kN
4.5 kN	N/A	12.0 kN

Technical	
FIRE PERFORMANCE	Class 'O' spread of flame, BS476-6 & BS476-7.
KEY DIMENSIONAL	Length: ± 0.4mm; Square: 600×600 [±] ± 0.5mm; Thickness ± 0.5mm.

Underfloor Plenum

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

Finish Option

All standard panels will be covered with our Gerflor Mipolan EL7 Robust static dissipative vinyl, other options include HPL, Wood, Ceramic and Stone.



ISO 14001



Supply & Install

01432 347 700

info@bathgateflooring.co.uk

Supply Only

01432 347 722

supplyonly@bathgateflooring.co.uk

Bathgate Flooring Unit 6G Thorn Business Park Hereford HR2 6JT

bathgateflooring.co.uk