

### Permaflor BEM69V

In accordance with the loadings for PSA MOB PF2/SPU for raised access floors


**Medium Grade  
600 x 900mm Panel**

#### For: Office use, Data Centres and Server Rooms

The panel comprises of a galvanised steel top and bottom sheet that are bonded to an FSC® certified, high density particle board core for greater strength and durability. The panel offers a static dissipative Vinyl or other customer approved finish, This then has a full depth ABS edge band applied creating a fully encapsulated 600 x 900mm panel

It is designed to be gravity laid with complete electrical continuity and has a high resistance to damage.

Our stock vinyl is available in Light & Dark Grey.

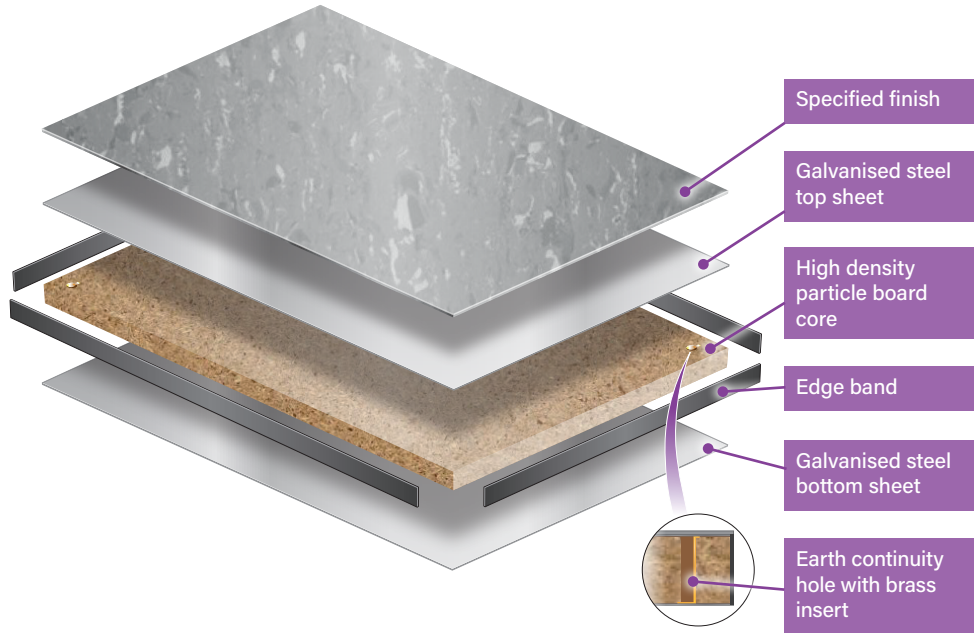


Panels			
PRODUCT CODE	PANEL GRADE	THICKNESS (Nominal)	SYSTEM WEIGHT
BEM69V	Medium	33mm	33kg/m <sup>2</sup>

System Performance		
POINT LOAD 25mm <sup>2</sup>	LOAD OVER 300mm <sup>2</sup>	(UDL) Uniformly Distributed Load
3.0 kN	4.5 kN	8.0 kN

Acoustic Performance					
AIRBOURNE			IMPACT		
Bare	Covering	Barrier	Bare	Covering	Barrier
43 dB	45 dB	51 dB	68 dB	55 dB	56 dB

Technical	
FIRE PERFORMANCE	Class 'O' spread of flame, BS476-6 & BS476-7.
KEY DIMENSIONAL	Length: ± 0.4mm; Square: 600x900 ± 0.5mm; Thickness ± 0.5mm.

#### Pedestal Options



Steel pedestals are electro plated and coated with an environmentally friendly clear passivation.

**BH** Void Range 26 - 675mm  
**BX** Void Range 75 - 1525mm

Pedestal caps available for all requirements and include a brass insert for electrical continuity. Pivot pedestal head and nickel plated pedestals also available.

#### Finish Option

All standard panels will be covered with our Gerflor Mipolan EL7 Robust static dissipative vinyl, other options include HPL, Wood, Ceramic and Stone.

#### Underfloor Plenum

This system can be supplied with neoprene gaskets to minimise air loss through the raised floor surface from the underfloor plenum to aid air circulation, distribution and management.

#### Stringers

Recommended for additional lateral stability in the following applications:

- 600-800mm void heights: Clip-on stringer system
- >800mm void heights: Screw-down stringer system

# Warranty only valid when a full Bathgate Access Floor system including panels and understructure is installed.  
\*\* Acoustic performance is expected to perform in excess of these figures based on the density and thickness of the particleboard. (figures shown are based on tests for the 30mm edge banded panel).

- Finished floor heights from 60mm to 1200mm are available using standard pedestals. For heights outside of this range alternative pedestals are available.
- Structural performance based upon a full Bathgate system i.e. panels & pedestals.
- All point and UDL loads perform to a 3x safety factor.



Supply & Install ☎ 01432 347 700 ✉ info@bathgateflooring.co.uk

Supply Only ☎ 01432 347 722 ✉ supplyonly@bathgateflooring.co.uk

📍 Bathgate Flooring Unit 6G Thorn Business Park Hereford HR2 6JT

🌐 bathgateflooring.co.uk